

NOTES:

- 1) MATERIAL: 2024-T3 SHEET, 0.080 THICK, PER QQ-A-250/4 OR AMS 4073 OR ASTM B209 (REF DART SPEC M2024T3S.080)
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
POWDER COAT "BLACK SANDTEX" (4.3.5.7) PER DART QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D3293-1" AND B/N "BXXXXX" PER DART QSI 044 6.1
- 8) MAKE PER DWG FILE "D3293-1_REV8.DXF"


B	ADD D3293-1B. REF. PAR12-223.	MB	12.11.15
A	NEW ISSUE	CP	04.06.28
REV.	DESCRIPTION	BY	DATE
DESIGN			
DRAWN			
CHECKED			
MFG. APPR.			
APPROVED			
DE APPR.			
DATE	12.11.15		


DART AEROSPACE LTD
HAWKESBURY, ONTARIO, CANADA

DRAWING NO. **D3293** REV. B
SHEET 1 OF 2

TITLE **DOUBLER** SCALE NTS

COPYRIGHT © 2004 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS
NOT TO BE USED FOR ANY PURPOSE OR DISCLOSED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT
WRITTEN PERMISSION FROM DART AEROSPACE LTD

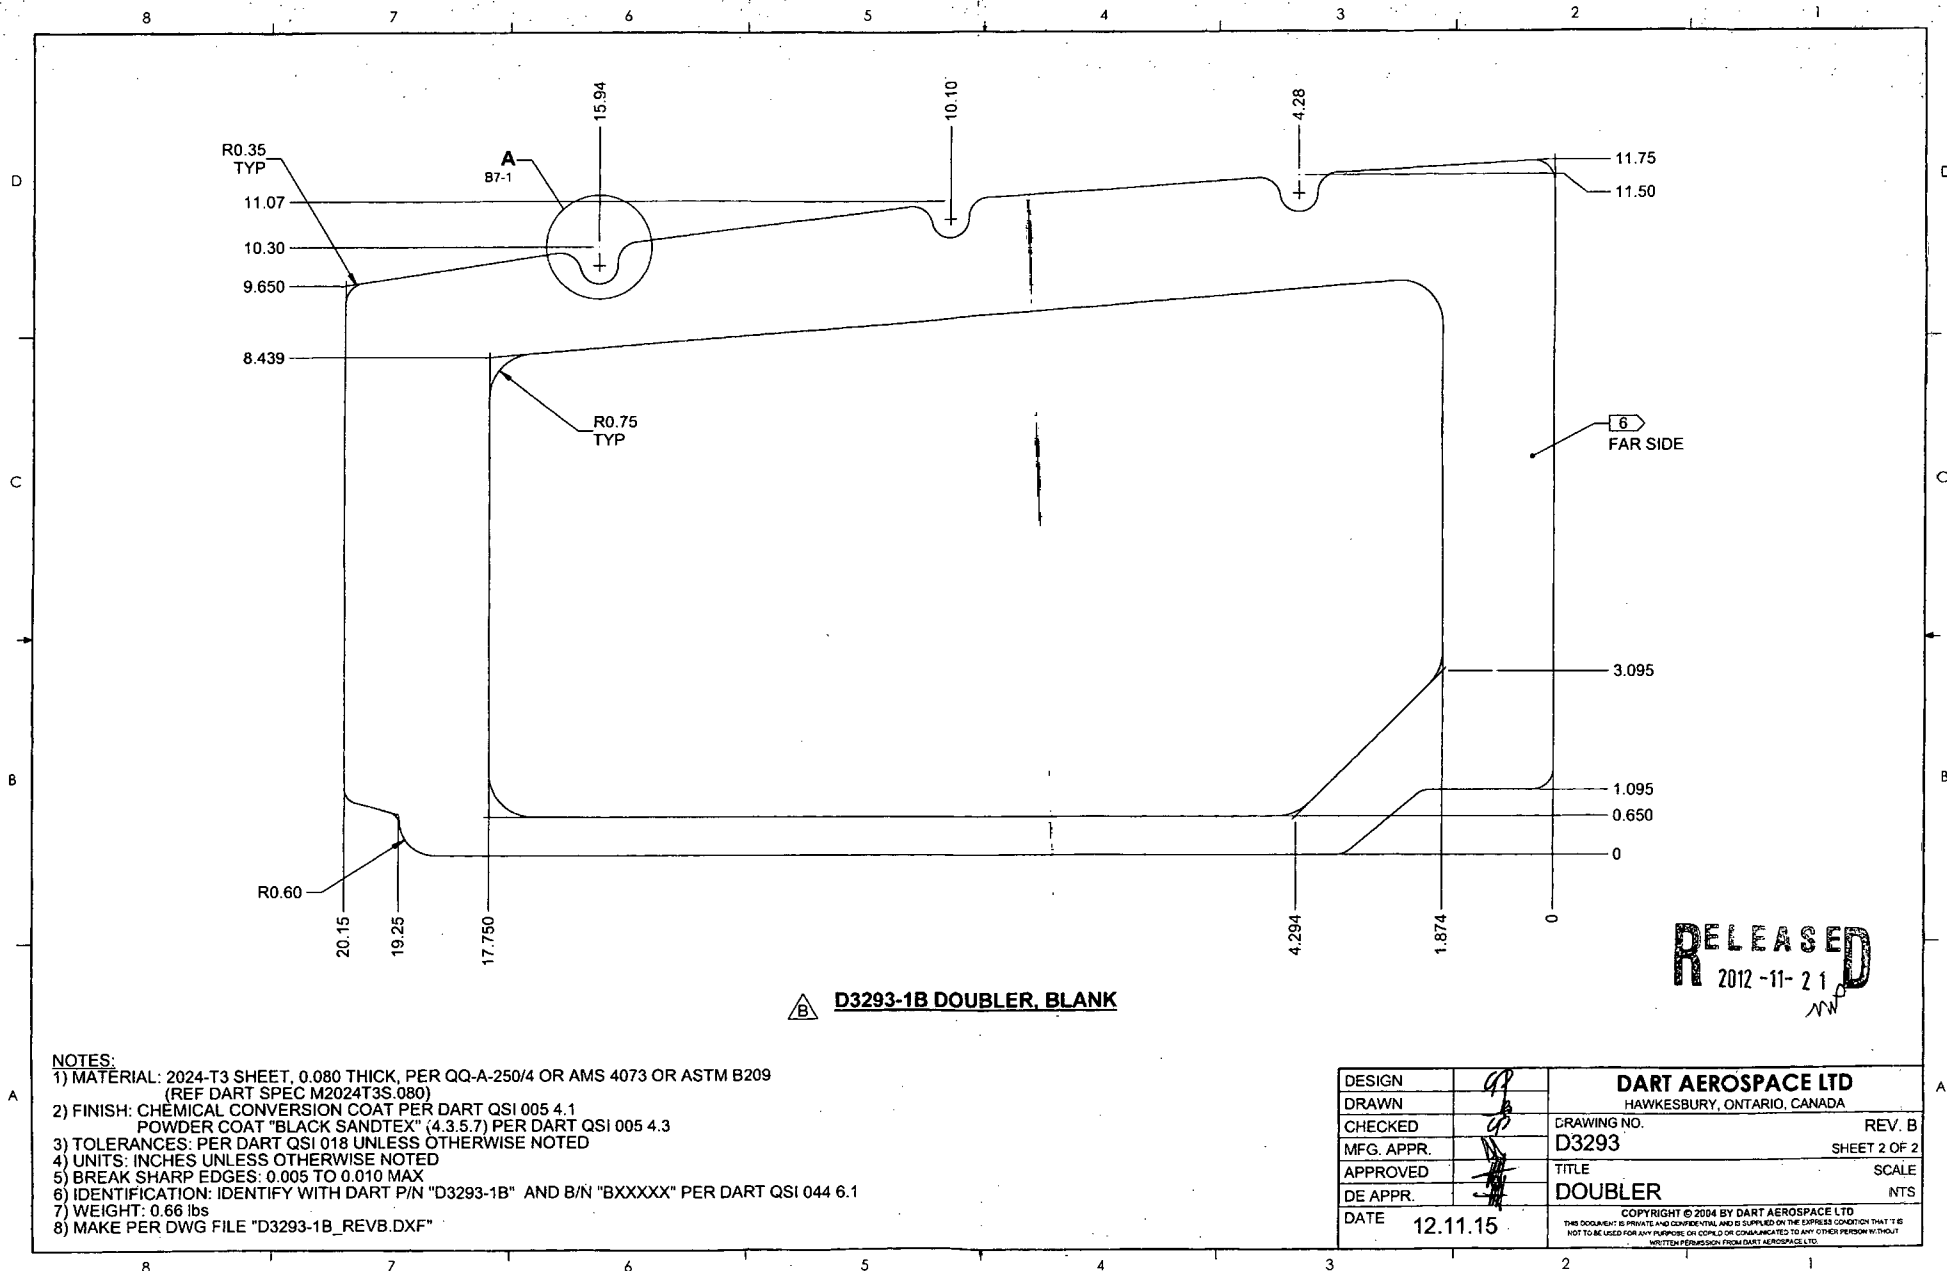

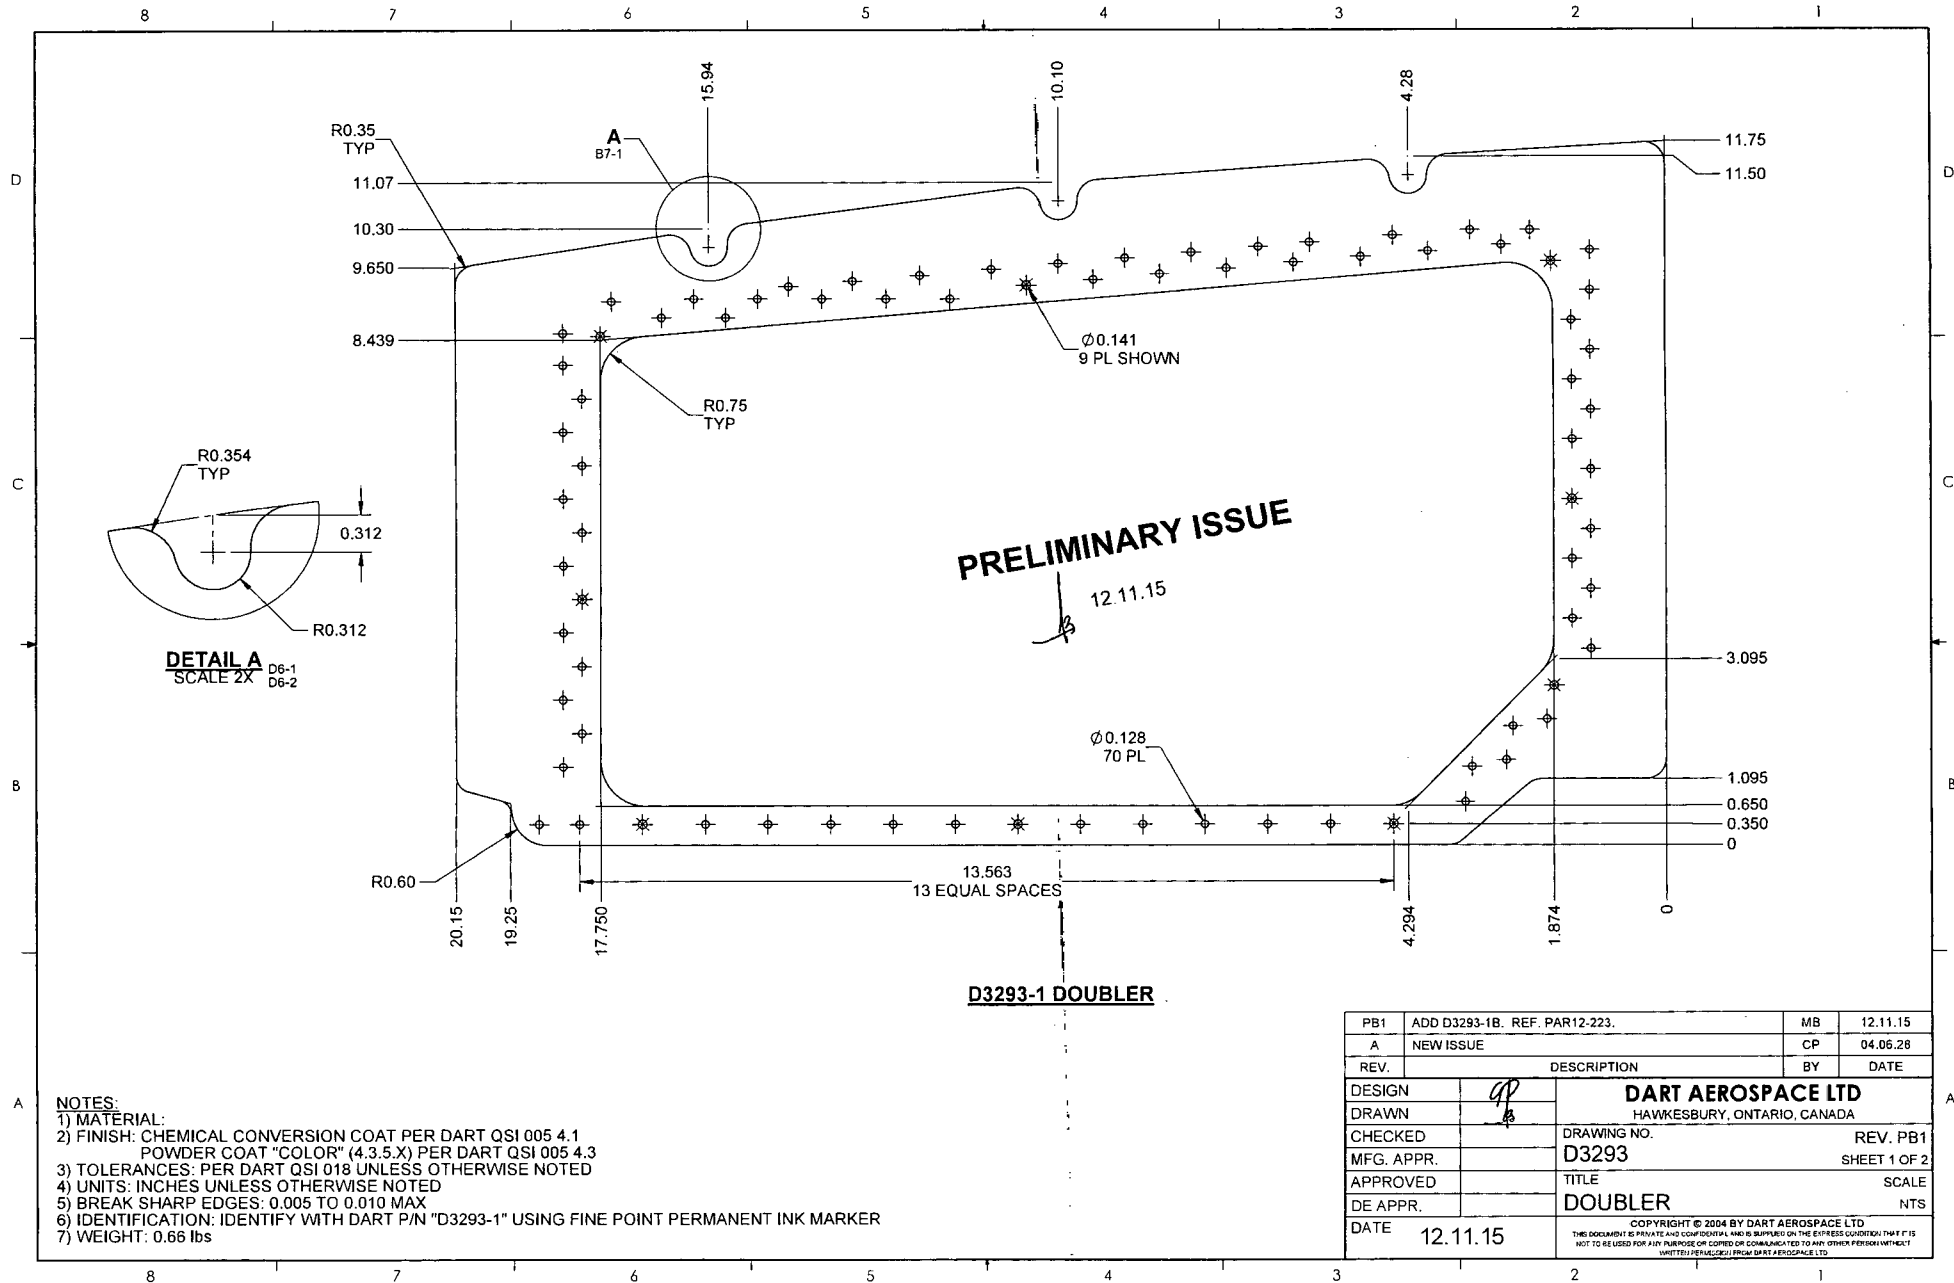

NOTES:

- 1) MATERIAL:
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
POWDER COAT "COLOR" (4.3.5.X) PER DART QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D3293-1" USING FINE POINT PERMANENT INK MARKER
- 7) WEIGHT: 0.66 lbs

